

12.8V200Ah V1

BLOCK TYPE LI-ION BATTERY
F @ D%&, &\$\$5



SAFETY

- + Long life type prismatic LiFePO4 cells, suitable for energy storage application.
- + Low voltage system, safety for application.
- + Cell certification: IEC62619, UL1642, UL9540A, BIS, ROHS,
- + Battery certification: UN38.3, MSDS
- + Cycle life >3500 cycles.

DESIGN

- + Flexible and easily installation, support wall mounted.
- + -20~+55°C widely temperature range.
- + Parallel support for more energy.
- + OVP, LVP, OCP, OTP, LTP protection.

12.8V200Ah V1

BLOCK TYPE LI-ION BATTERY
F @ D%&, &\$\$5

PARAMETERS




Model	AMUŠZÜFG GEECE
Cell and Connection	CB27173204EA 2P4S
Nominal Voltage [V]	12.8
Nominal Capacity [Ah]	200
Total Energy [Wh]	2560
Max. Charging Current [A]	100
Recommended Charging Current [A]	100
Charging Voltage [V]	14.2~14.6
Max. Discharging Current [A]	100
End of Discharge Voltage [V]	11.2
Operating Temperature Range	Discharge: -20 ~ +55°C
Protection	Over charge, Over discharge, Over temperature, Short circuit
Cycle Life ⁽¹⁾	>3500 cycles
Designed Calendar Life	10 Years
Communication Port	/
LED Indicator and Button	/
Dimension (W*D*H, mm)	560*250*120
Weight [Kg]	24.8
Operation Humidity	0~95% RH (No condensing)
IP Class	IP30
Parallel Support ⁽²⁾	Yes, Max, 4Sets
Series Support	Yes, Max. 4 Sets
Certification-Cell	UN38.3; ROHS; UL
Certification-Battery	UN38.3; MSDS
Optional Parts	/

Note:

- (1) 25°C, 0.5C/0.5C, 90%DOD and 70% EOL
- (2) For parallel connection operation, refer to user manual.
- (3) For series connection, it won't support communication.


LI-ION BATTERY

DIMENSION F @ D%&, &\$\$5

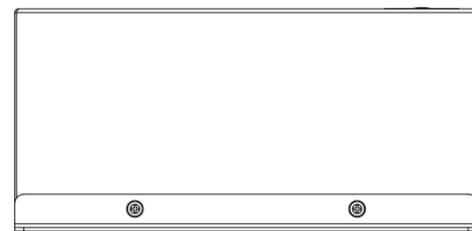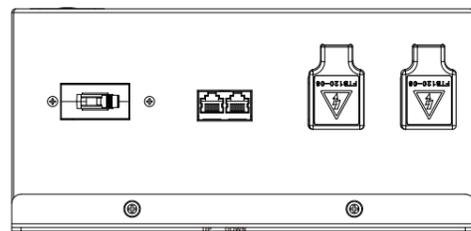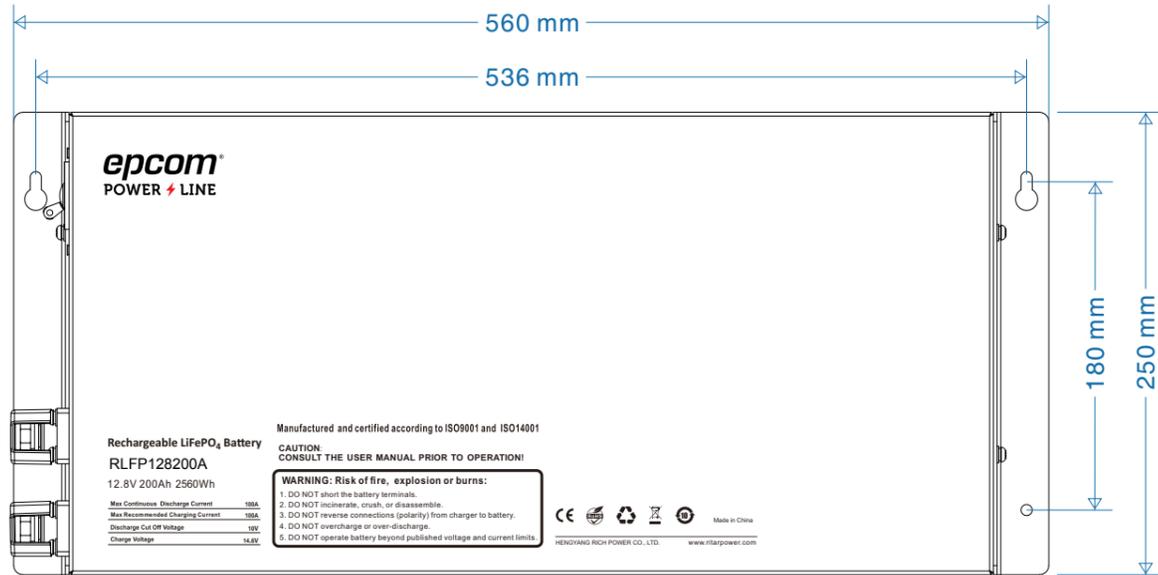

LI-ION BATTERY

INTERNAL STRUCTURE DIAGRAM

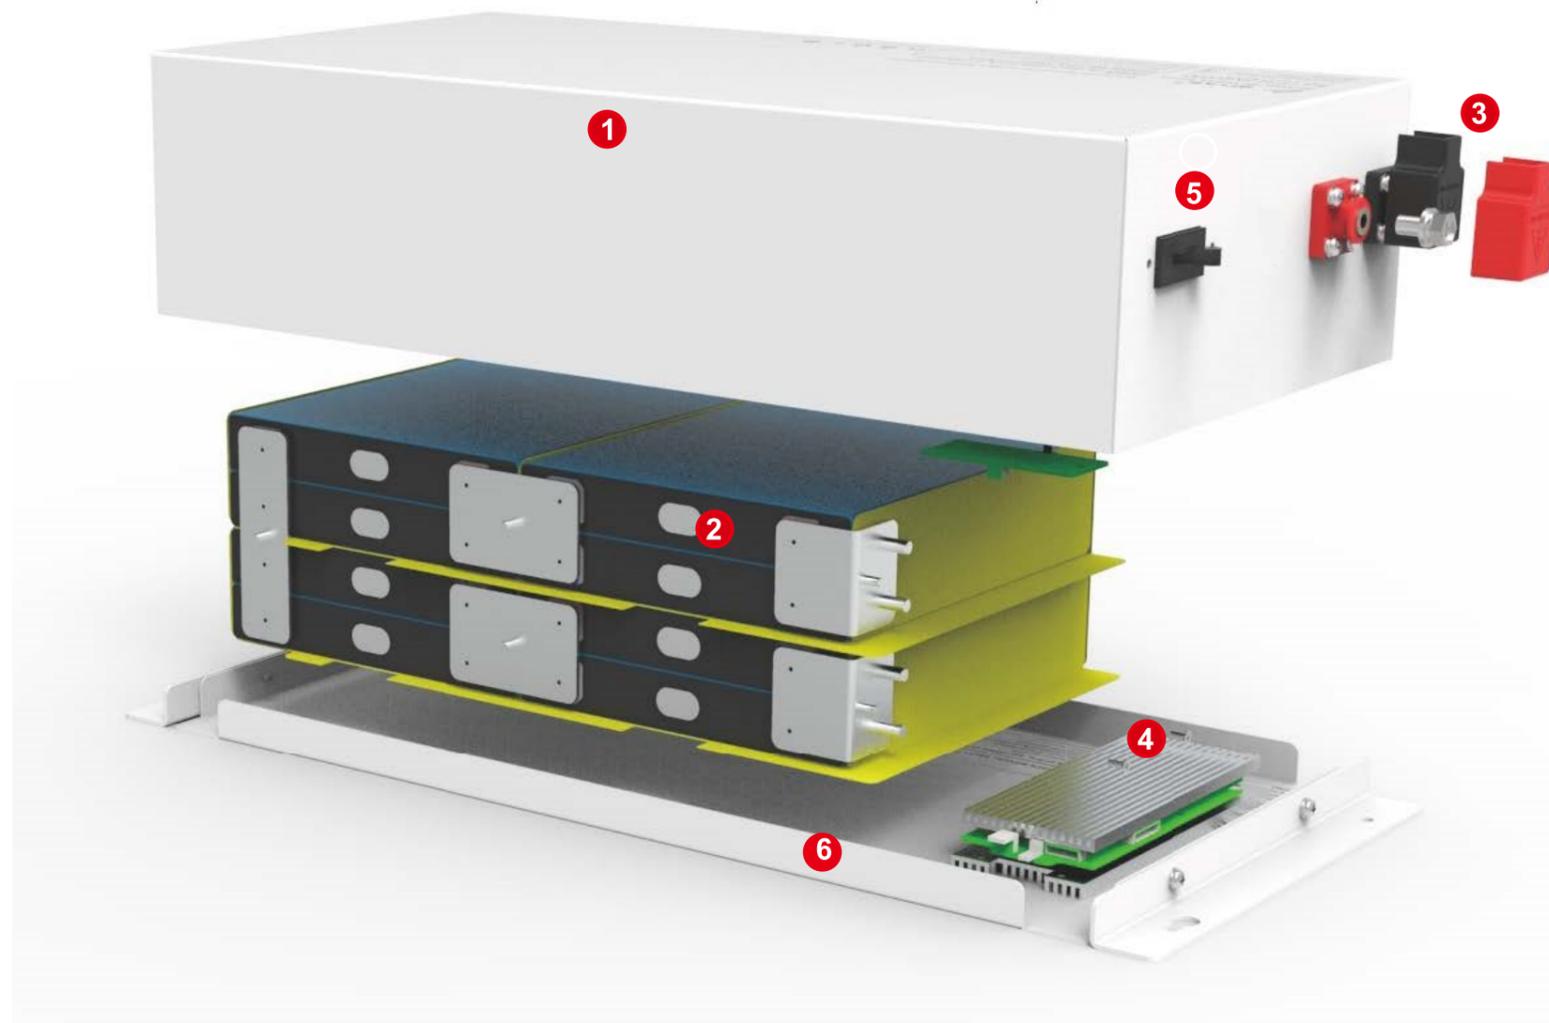

① Top Cover-SPCC with painting

② Cell- 3.2V100Ah, 2P4S

③ Power Terminal

④ BMS

⑤ Micro circuit Breaker (MCB)

⑥ Bottom case- SPCC with painting